


Submitted Model No.: _____
 Specific Features: _____



▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

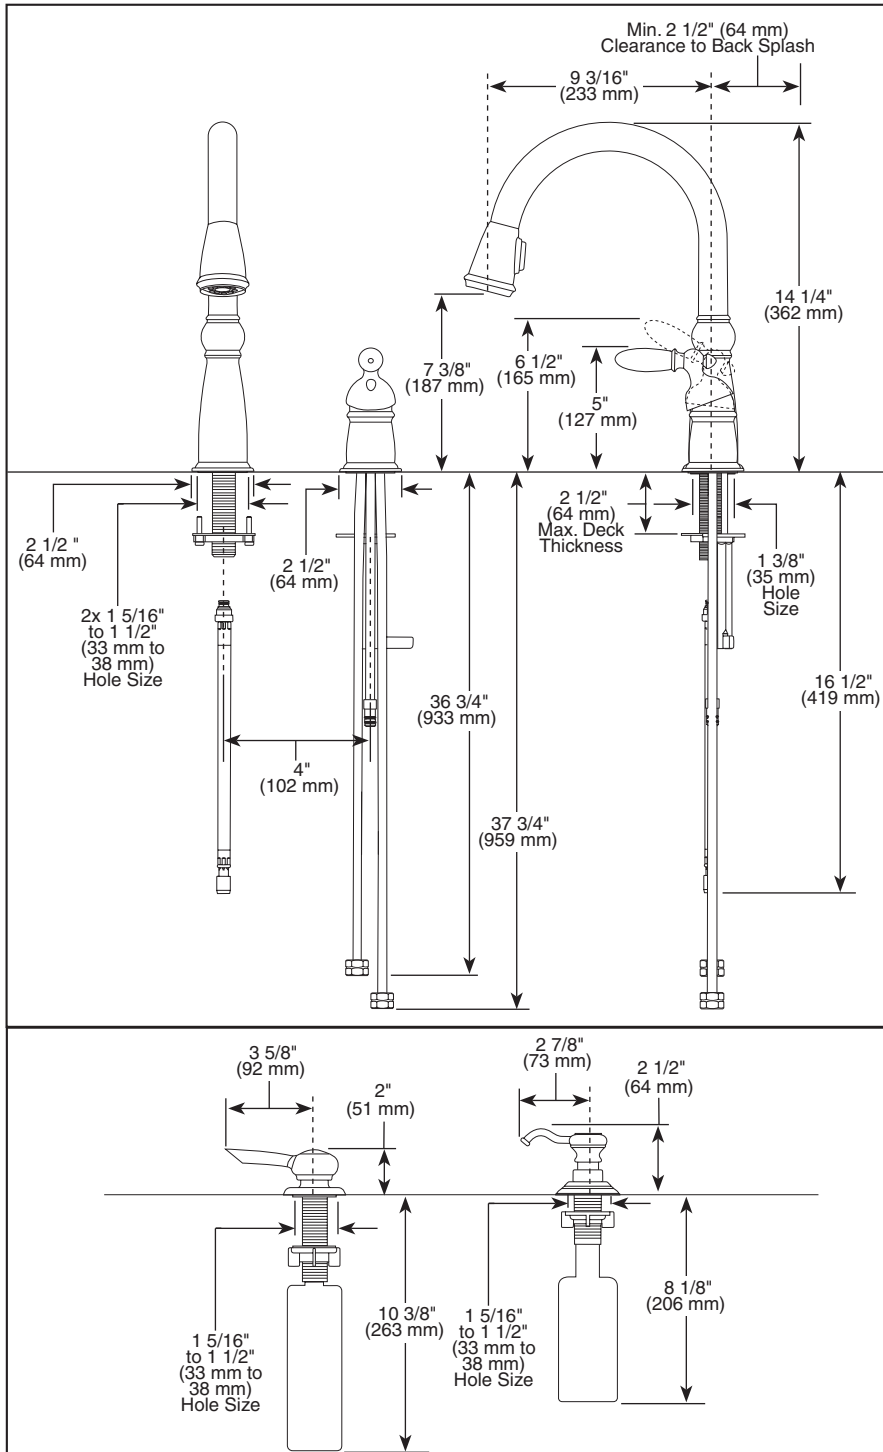

KITCHEN FAUCETS

- Victorian® Collection
- Single Handle Widespread
- 2 or 3 Hole Sink Applications
- Optional Soap Dispenser
- DIAMOND Seal® Technology
- Integrated Supply Tubes
- MagnaTite® Docking System
- 2-Function Pull-Down

STANDARD SPECIFICATIONS:

- 14 1/4" (362 mm) high, 9 3/16" (233 mm) long, spout swings 360°.
- Control mechanism shall be the diamond coated ceramic cartridge.
- Lever handle. Control shall return to neutral position when faucet is turned off.
- Touch-Clean® 2 function (stream/spray) sprayhead.
- Magnetic docking system secures sprayer to spout.
- 3/8" O.D. straight, staggered pex supply tubes - 36 3/4" (933 mm) and 37 3/4" (959 mm) long.
- Finished handle button with red/blue graphics to indicate hot/cold temperature.
- Integral double check valves in sprayer assembly.
- Recommended hole size 1 3/8" (35 mm) on 4" (102 mm) centers.
- RP60735 wand assembly available with flow rate of 1.5 gpm max. @ 60 PSI.

Note: See 9955* for matching bar/prep.


WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.

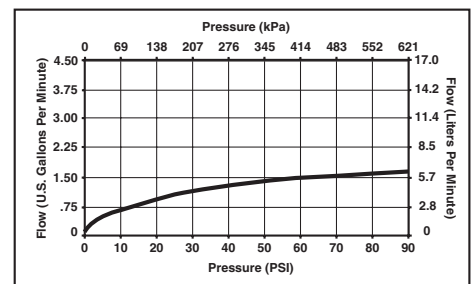

55 E. 111th Street, Indianapolis, Indiana 46280
 350 South Edgeware Road, St. Thomas, ON N5P 4L1
 © 2011 Masco Corporation of Indiana